

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number  
**WO 2004/028701 A1**

(51) International Patent Classification<sup>7</sup>: **B05B 1/04,**  
D21H 23/50

(21) International Application Number:  
PCT/FI2003/000702

(22) International Filing Date:  
26 September 2003 (26.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
20021719 26 September 2002 (26.09.2002) FI

(71) Applicant (for all designated States except US): **METSO  
PAPER, INC.** [FI/FI]; Fabianinkatu 9 A, FIN-00130  
Helsinki (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NISSINEN,**

Vilho [FI/FI]; Onkimaantie 195, FIN-04660 Numminen  
(FI). **LINJAMÄKI, Mika** [FI/FI]; Viilarinkatu 6 A 2,  
FIN-04440 Järvenpää (FI).


(74) Agent: **BERGGREN OY AB**; P.O. Box 16, Jaakonkatu 3  
A, FIN-00101 Helsinki (FI).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: NOZZLE

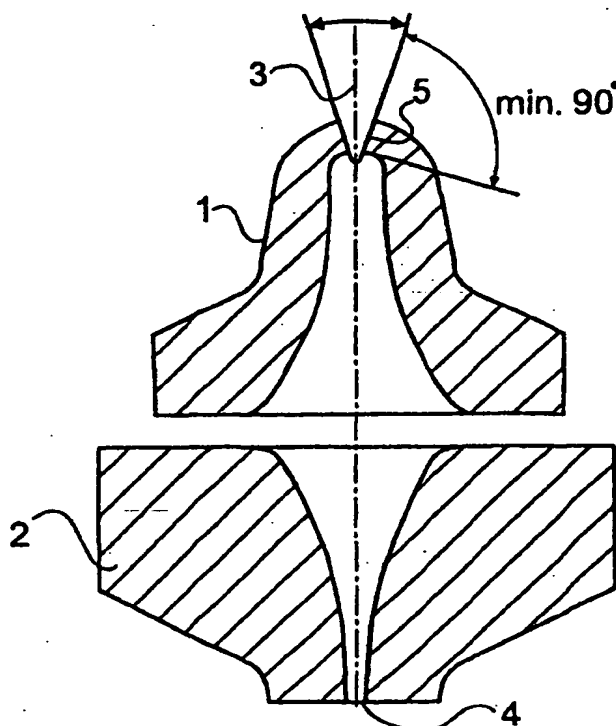

(57) **Abstract:** The invention relates to a nozzle for use in the coating of a web-like material by means of high-pressure spraying techniques, the nozzle (1) being manufactured by forming a piece having a tapered duct ending in a closed tip, with a transverse V-shaped groove (3) subsequently machined in the tip. The angle of the V-shaped groove (3) is in the range from 25 to 50°, such as 35 to 45°.

WO 2004/028701 A1